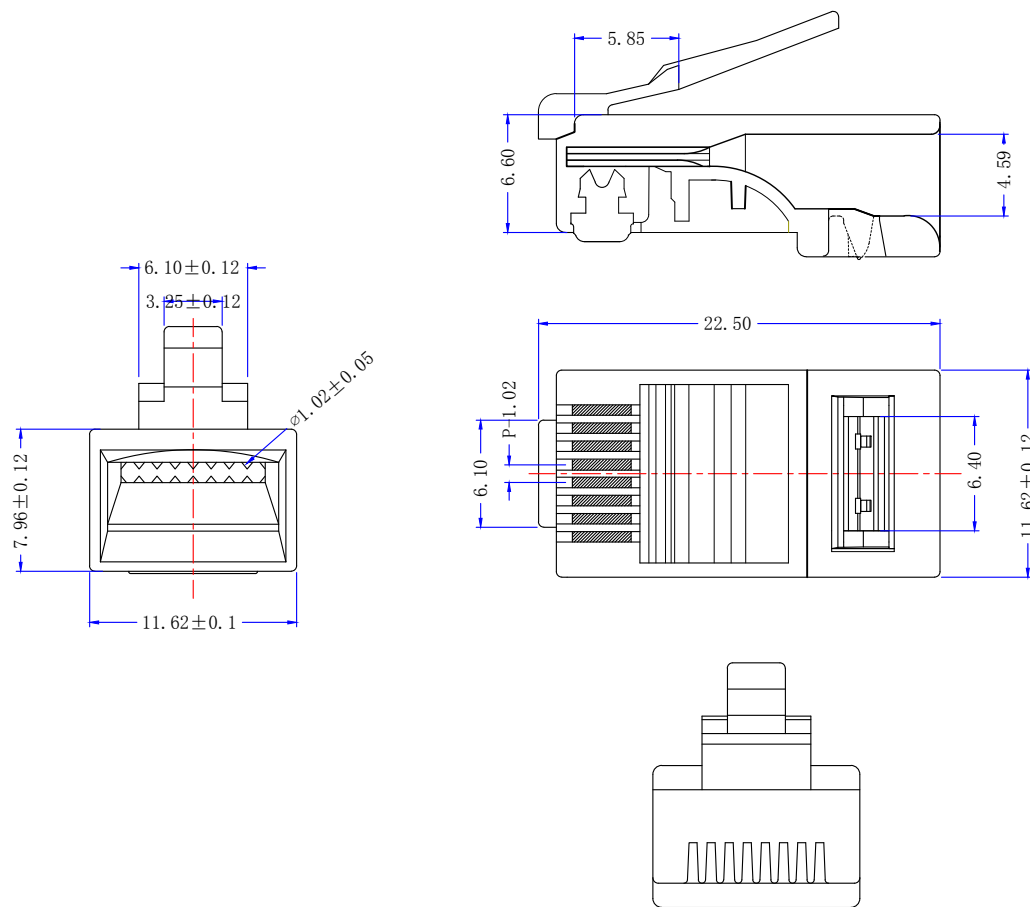




FEATURES:

1 Electrical Test:

- A. 250V ac max, at 2A.
- B. Dielectric with standing 1000V/DC/min, <0.5A.
- C. Insulation Resistance: >500M Ω , 1000V./min
- D. Contact Resistance: <20M Ω

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 2000 mating cycles.

特征:

1 电气特性:

- A. 250伏特AC. 最大两安培耐电压伏特数
- B. 耐电压测试: 小于0.5安培1000伏特DC/一分钟.
- C. 绝缘抗阻: 1000伏特DC/一分钟, 大于500百萬歐姆
- D. 接触凹坑: 不大于20m Ω (毫歐姆)



2 机械特性:

- A. 拉力测试-电缆至插座张力强度至少一分钟20磅 (89N)
- B. 耐力测试-拔插测试2000次以上.

BLADE:		A3		B4		B7		B9		B20	
Drawing											
Mark											

GOLD PLATING	0U"	FU"	2U"	3U"	6U"	15U"	30U"	50U"	/	//
Mark										

XLEP 东莞市祥磊电子有限公司

DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL PC (聚碳酸酯)	产品编号 PART NO 88R-D5/Q
.X $\pm$ 0.20	.X° $\pm$ 5°	名称 TITLE 8P8CR	
.XX $\pm$ 0.10	.XX° $\pm$ 2°		
审核 APPROVAL	核对 CHECKED 	制图 DRAWN	比例 SCALE FULL
		三角视图 PROJ 	日期 DATE 2019.1.19
			目录编号 CATALOG NO. XL-303